



## ADVANTAGES

- Broadband performance
- Low profile, economical design
- Designed for indoor & outdoor use
- Easy to mount
- Rugged U/V stable radome
- Ground independent



## SPECIFICATIONS

### SELECTION CHART

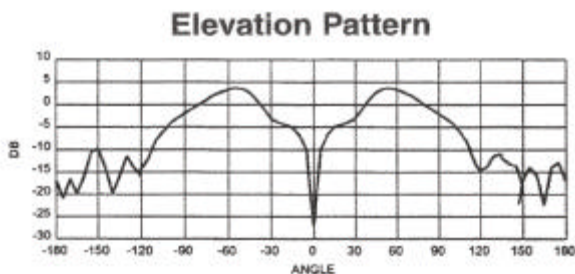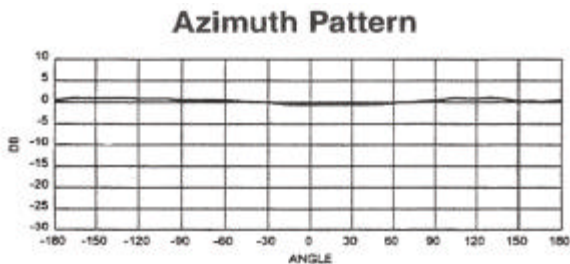

### ELECTRICAL:

Frequency (MHz)	890-960
Element Type	Edge Slot Radiator
Polarization	Vertical
Gain, dBi, min	+ 3 dBi
Azimuth Beamwidth	Omnidirectional
Elevation Beamwidth	Cosine
VSWR	1.5:1 (@ resonance 2:1)
Impedance	50 Ohm
Power	50 Watts
Cable Type	RG-58U-3ft

### MECHANICAL:

Connector	N-Male
Mounting Hardware	Base Mounting Plate, Adhesive Backed
Temperature	-40° F to +160° F
Dimensions	3.0" Dia. Top, 4.5" Dia. Base, 0.62" Height
Weight	<1 lb